
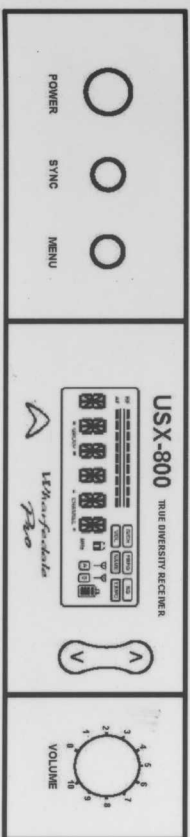


Wharfedale
Pro

USX-800

**Wireless Microphone
System**

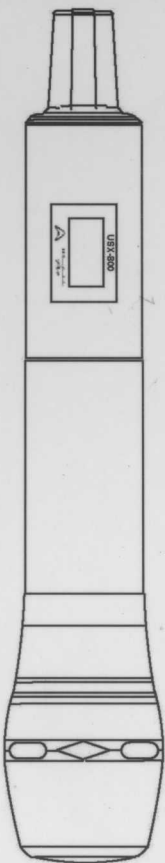

PRELIMINARY MANUAL

Wharfedale Pro USX-800 - Single Channel Wireless Microphone System
Preliminary Wireless Microphone User Manual

Table of Contents

- 1... Table of Contents / Warranty Statement / Warnings & Disclaimer
- 2... Preface / System Inventory
- 3... Parts Names and Functions
- 4... Setup (Transmitter / Microphone)
- 5... Installation of the Receiver
- 6... Audio Output Connections
- 7... Receiver Settings / Lock / Unlock Function
- 8... LCD Display Legend / Display Modes
- 9... Function Descriptions / Battery Status
- 10... Specifications
- 11... Appendix
- 12... Contact Information

Wharfedale Professional Limited Warranty: The USX-800 Wireless Microphone System is warranted to be free of manufacturing or materials defects for a period of one year from the original date of purchase. In the event of warranty related malfunction, contact your authorised Wharfedale Professional dealer or distributor. Be aware that warranty details differ from country to country.

WARNING: DUE TO THE RISK OF FIRE OR ELECTRICAL SHOCK, DO NOT EXPOSE THIS UNIT TO RAIN OR MOISTURE.

Unpacking: All Wharfedale Pro products are fully tested before leaving the factory. After unpacking, please inspect the unit. In the event of any noticed damage due to shipping, contact your dealer and the shipping provider immediately to file a shipping damage claim. Retain the shipping carton and all packaging material in case the unit needs to be returned.

!WARNING! – Read all operating instructions that accompany this product!

!WARNING! – Do not attempt to open the unit! This unit is not user serviceable!
Refer all servicing to qualified electronic service personnel only!

NOTE:

This is a preliminary manual for the Wharfedale Pro USX-800 Wireless Microphone System.
The final manual, when available, will be posted on our website at: www.wharfedalepro.com.

Wharfedale Pro USX-800 Wireless Microphone System

Thank you for selecting the Wharfedale Pro USX-800 single channel wireless microphone system! Before operating the system, please read this instruction manual thoroughly for a complete understanding of the product features and correct operating procedures

System Inventory

- (1) Injection molded carrying case
- (1) USX-800 True Diversity Receiver
- (1) USX-800 Wireless Transmitter / Microphone
- (2) Screw on antenna assemblies
- (1) Power supply / power cord
- (2) AA batteries
- (1) Unbalanced line cable with 1/4" plugs
- (1) Rack Mount Adapter
- (1) User manual
- (1) Warranty Registration card

Parts names and functions

-Front panel (Fig.1)

1. **POWER** switch
2. **SYNC** button: Synchronization of transmitter & receiver. (Automatic Channel Matching)
3. **MENU** button: Multiple function selection.
4. **SYNC** I/R receiver: Works with the microphone transmitter SYNC signal
5. **LCD Display**: Shows currently selected function parameter
6. **Group Select** button: Changes group setting parameter.
7. **Channel Select** button: Changes channel setting parameter.
8. **VOLUME** Control: Adjusts output volume level.

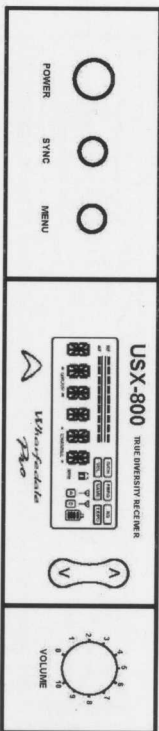


Fig. 1

-Rear panel (Fig.2)

9. **ANTENNA B** connector
10. Output 'LEVEL' Switch: "MIC" selection when the output is connected to a microphone input of a mixer, "LINE" selection when the output is connected to a line level input of a mixer.
11. **BALANCED OUTPUT** XLR connector
12. **UNBALANCED OUTPUT** 1/4" jack .
13. **DC INPUT** 12V power input jack.:
14. **ANTENNA A** Connector

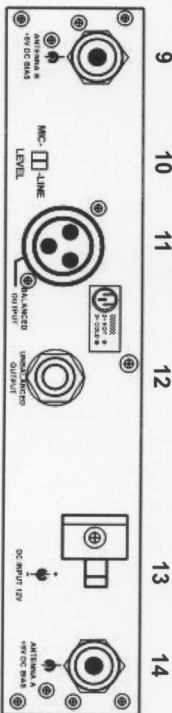


Fig. 2

Setup

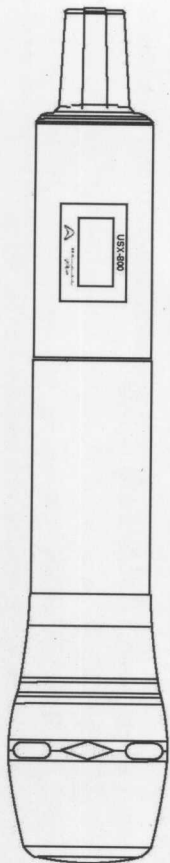


Fig. 3

Transmitter / Microphone (Fig.3)

-Install the provided "AA" batteries in the microphone battery compartment (Fig.4 / 5) by holding the main barrel of the microphone firmly while turning to unscrew the transmitter section (the portion with the LCD display) and slide it open to reveal the battery compartment in the middle section of the mic.




Fig.4




Fig.5

-Once the batteries are installed and the battery compartment is closed and tightened, switch the microphone ON (the "I" setting on the small switch at the end of the microphone barrel) to verify proper battery installation. The red LED on the mic should illuminate and the LCD display on the mic will become active.

-Turn the microphone off (the '0' switch setting at the end of the microphone barrel) before proceeding.

Installation of the Receiver

Receiver

-Connect the antennas into **ANTENNA A** connector (14) and **ANTENNA B** connector (9) at the rear of the USX-800 Receiver as shown below. (Fig 6/A). Rotate and flip the antennas to the upward position as shown in **FIG.6-B**.

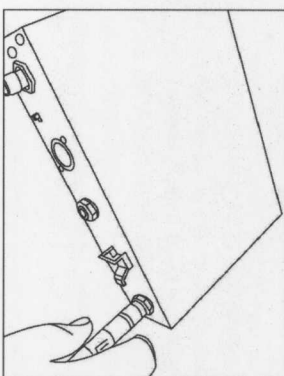


Fig. 6A

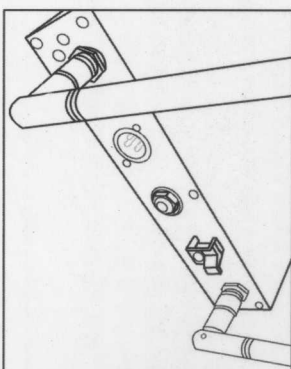


Fig. 6B

Connecting the power:

Connect the AC/DC adapter cable to the **DC INPUT 12V** socket (13) as shown in **Fig.7**. Connect the other end of the cord to the AC source voltage outlet. (Caution: The specification of the adapter should be compatible with the voltage specification for the local power source voltage.)

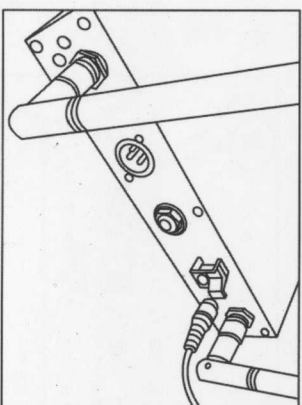


Fig.7

Audio Output Connections:

Select the 'LINE' position of the 'LEVEL' switch (10) when the output of the receiver is connected to the line level input of a mixer or amplifier. Select the 'MIC' position of the 'LEVEL' switch (10) when the output of the receiver is connected to a microphone level input of a mixer. Overload conditions may occur if the 'LEVEL' switch is set to the wrong position.

-The 'BALANCED OUTPUT' (11) should be used when the receiver is going to be connected to either a microphone or line level, balanced input of a mixer. Excessive cable length for a balanced connection is generally not a problem.

-The 'UNBALANCED OUTPUT' (12) should be used when the receiver is going to be connected to the 1/2" input jack of a mixer or an amplifier (usually line level) that uses a 1/2" phone plug. Use the appropriate setting on the 'LEVEL' switch (10) on the rear panel of the USX-800. Cable length for this type of connection should be limited to less than 15 feet (5 meters).

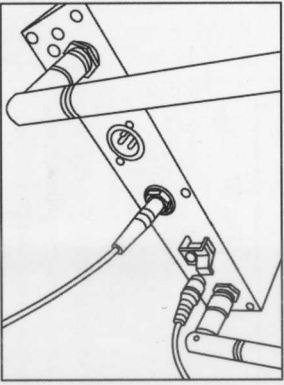


Fig. 8

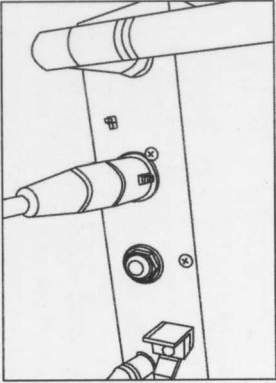


Fig. 9

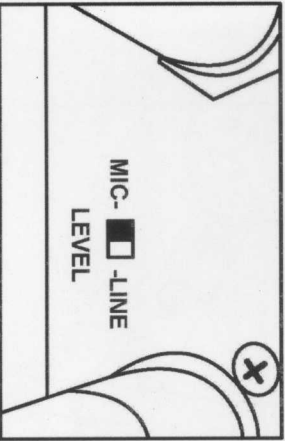


Fig. 10

Receiver Settings

-In accordance with the operating instructions of the sound system's mixer, adjust the appropriate mixer settings and gradually increase the 'VOLUME' knob (8) on the USX-800 receiver to achieve a suitable level setting of the microphone signal.

-Verify that the 'VOLUME' control setting is at its minimum (fully counterclockwise).

-With the microphone still turned OFF, Press and hold the 'POWER' button (1) on the front panel of the receiver until the LED display lights up.

-Once the display is fully illuminated, press the 'MENU' button (3), repeatedly, until the "G/CH" icon is highlighted. The display will read the currently selected "GROUP" number and "CHANNEL" number. These settings can be changed with the UP/DOWN buttons. It is not necessary to change these settings in order for the system to work, but they can be changed if any signal interference is experienced. See the Appendix for Group/Channel/Frequency assignments.

-To change the "GROUP" setting, press the "up" button (6) (next to the 'VOLUME' knob) repeatedly until the desired "GROUP" number is displayed. There are 9 Groups available.

-To change the "CHANNEL" setting, press the "down" button (7) (next to the VOLUME knob) repeatedly until the desired "CHANNEL" number is displayed. See the Appendix for Group/Channel correlations.

-Once these settings are made, turn the microphone on and press the 'SYNC' button and the receiver will automatically synchronize with the microphone transmitter at the selected Group/Channel frequency assignment. The synchronization is successful when the "RF" level meter shows a signal indication. The "AF" meter will respond to any sounds being picked up by the microphone. Speaking into the mic should show significant audio level indications on the "AF" meter. Other indications on the receiver's display will also indicate "TX" (transmit) and one of the "A" or "B" antenna indicators will be highlighted showing which antenna has been automatically selected for the strongest reception.

LOCK / UNLOCK function:

-Holding the 'MENU' button down for more than 3 seconds will result in the word "LOCK" being displayed on the LCD panel. This function stores the unit's settings at the currently selected configuration. When the unit is in "LOCK" mode, holding the 'MENU' button for 3 seconds will toggle the function back to the "UNLOCK" mode and parameters can be changed.

The lock icon:



will be displayed when the "LOCK" function is active.

